



REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

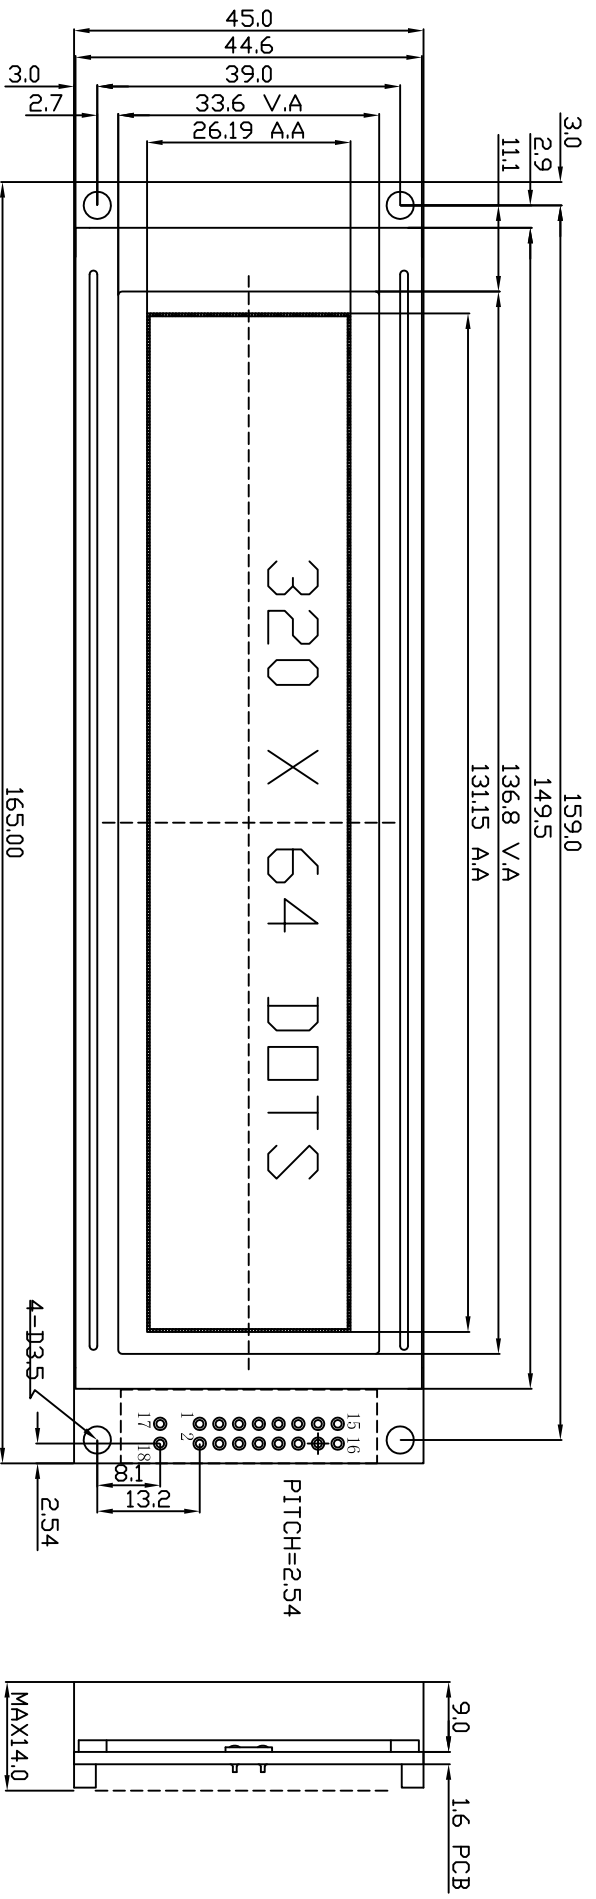

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0~DB7	/CS	/RST	LEDA	LEDK

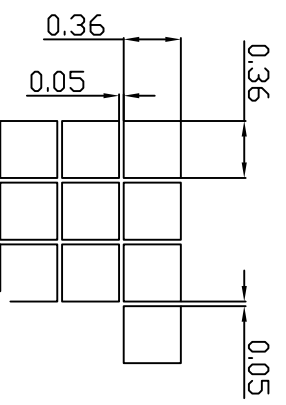

- NOTE:
1. STN-TRANSFLECTIVE-POSITIVE-Y/G-UV
 2. VIEWING DIR: 6:00 DUTY:1/64 BAIS:1/9
 3. VDD=5.0V, VOP=14.5V
 4. BACKLIGHT: BOTTOM LED, YELLOW-GREEN, VLED=5.0V
 5. CONTROLLER IC: NT7107
 6. OP. TEMP.: -20° C TO 70° C
 7. ST. TEMP.: -30° C TO 80° C